


LRFD Bridge Design Manual

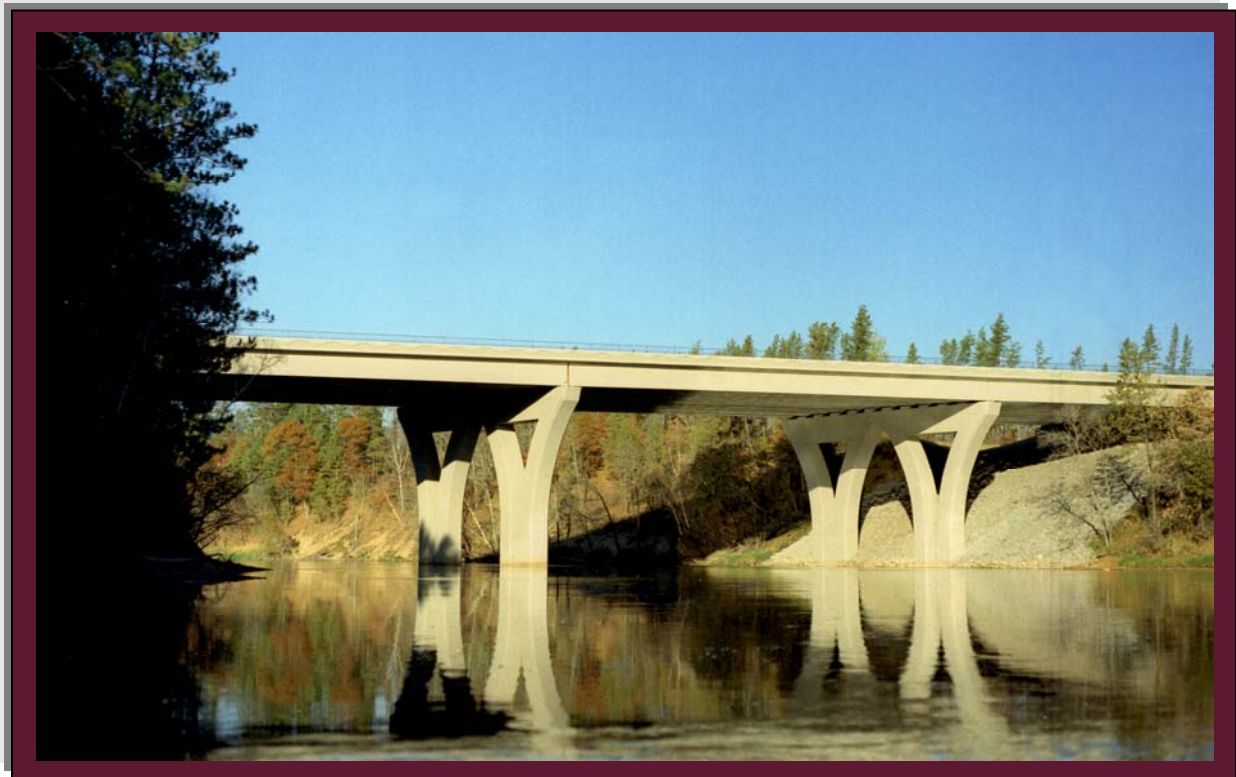

mn DEPARTMENT OF
TRANSPORTATION

BRIDGE OFFICE

MANUAL

5-392

MINNESOTA DEPARTMENT OF TRANSPORTATION

Bridge Office

LRFD Bridge Design Manual

MnDOT BRIDGE OFFICE

LRFD Bridge Design Manual

Minnesota Department of Transportation
3485 Hadley Avenue North • Mail Stop 610
Oakdale, MN 55128-3307
Phone: 651/366-4500 • Fax: 651/366-4497

JULY 2003 OCTOBER 2003 JANUARY 2004 APRIL 2004 OCTOBER 2004 DECEMBER 2004
FEBRUARY 2005 MARCH 2005 NOVEMBER 2005 MARCH 2006 APRIL 2006 MAY 2006
AUGUST 2006 OCTOBER 2006 FEBRUARY 2007 JUNE 2007 JULY 2007 OCTOBER 2007
APRIL 2008 MAY 2008 JUNE 2008 AUGUST 2008 SEPTEMBER 2008 OCTOBER 2008
APRIL 2009 MAY 2009 OCTOBER 2009 MARCH 2010 JUNE 2010 DECEMBER 2010 JUNE 2011
SEPTEMBER 2011 OCTOBER 2011 DECEMBER 2011 APRIL 2012 NOVEMBER 2012 APRIL 2013
SEPTEMBER 2013 FEBRUARY 2014 JULY 2014 AUGUST 2014 DECEMBER 2014 MAY 2015
JUNE 2015 AUGUST 2015 MAY 2016 JULY 2016 AUGUST 2016 DECEMBER 2016 MARCH 2017
OCTOBER 2017 NOVEMBER 2017 DECEMBER 2017

TABLE OF CONTENTS

- 1. INTRODUCTION 1-1
 - 1.1 Overview Of Manual 5-392 1-1
 - 1.1.1 Material Contained in Manual 5-392 1-1
 - 1.1.2 Updates to Manual 5-392 1-2
 - 1.1.3 Format of Manual References..... 1-2
 - 1.2 General Bridge Information 1-2
 - 1.2.1 Bridge Office 1-3
 - 1.2.2 Highway Systems..... 1-9
 - 1.2.3 Bridge Numbers..... 1-9
 - 1.2.4 Limit States to Consider in Design 1-12
 - 1.3 Procedures 1-12
 - 1.3.1 Checking of Mn/DOT Prepared Bridge Plans 1-12
 - 1.3.2 Checking of Consultant Prepared Bridge Plans 1-13
 - 1.3.3 Peer Review for Major or Specialty Bridges 1-17
 - 1.3.4 Schedule for Processing Construction Lettings..... 1-20
 - 1.3.5 Bridge Project Tracking System..... 1-22
 - 1.3.6 Approval Process for Standards..... 1-26

- 2. GENERAL DESIGN AND LOCATION FEATURES 2-1
 - 2.1 Geometrics 2-1
 - 2.1.1 Bridge Geometrics..... 2-1
 - 2.1.2 Bridge Deck Requirements 2-2
 - 2.1.3 Bridge Undercrossing Geometrics 2-8
 - 2.1.4 Geometric Details 2-14
 - 2.1.5 Bridge Barriers and Railings..... 2-16
 - 2.2 Bridge Aesthetics 2-16
 - 2.3 Preliminary Bridge Plans 2-16
 - 2.3.1 General 2-16
 - 2.3.2 Bridge Type Selection 2-24

2.4	Final Bridge Plans and Special Provisions	2-29
2.4.1	Final Design Instructions	2-30
2.4.1.1	Superstructure	2-31
2.4.1.1.1	Framing Plan	2-31
2.4.1.1.2	Bridge Decks and Slabs.....	2-32
2.4.1.1.3	Diaphragms and Cross Frames.....	2-33
2.4.1.2	Pedestrian Bridges	2-34
2.4.1.3	Temporary Bridges and Widening.....	2-36
2.4.1.4	Bridge Approaches.....	2-36
2.4.1.5	Survey.....	2-37
2.4.1.6	Utilities	2-37
2.4.1.6.1	Suspended Utilities	2-37
2.4.1.6.2	Buried Utilities	2-38
2.4.1.7	Precedence of Construction Documents.....	2-42
2.4.1.8	Design Calculation Requirements	2-42
2.4.2	Final Plans	2-42
2.4.2.1	Drafting Standards	2-43
2.4.2.2	Drafting Guidelines	2-44
2.4.2.3	General Plan and Elevation	2-46
2.4.2.4	Bridge Layout and Staking Plan	2-51
2.4.2.5	Standard Abbreviations	2-54
2.4.2.6	Inclusion of Standard Bridge Details and Bridge Standard Plans in Plan Sets.....	2-54
2.4.2.7	Standard Plan Notes	2-55
2.4.2.8	Quantity Notes and Pay Items	2-56
2.4.3	Revised Sheets	2-58
2.5	Reconstruction Guidelines and Details	2-60
2.5.1	Superstructure	2-60
2.5.1.1	Barriers.....	2-60
2.5.1.2	Wearing Course.....	2-60
2.5.1.3	Expansion/Fixed Joints	2-60
2.5.2	Substructure	2-71
2.5.2.1	Abutments.....	2-71

2.5.2.2	Piers.....	2-75
2.5.3	Pavement	2-75
2.6	Construction Requirements.....	2-81
APPENDIX 2-A:	BRIDGE TYPE NUMBERS	2-82
APPENDIX 2-B:	STANDARD ABBREVIATIONS	2-83
APPENDIX 2-C:	STANDARD PLAN NOTES.....	2-86
APPENDIX 2-D:	STANDARD SUMMARY OF QUANTITIES NOTES.....	2-108
APPENDIX 2-E:	CONVERSION FROM INCHES TO DECIMALS OF A FOOT	2-110
3.	LOAD AND LOAD FACTORS.....	3-1
3.1	Load Factors and Combinations.....	3-1
3.2	Load Modifiers	3-4
3.3	Permanent Loads (Dead and Earth)	3-4
3.4	Live Loads	3-5
3.4.1	HL-93 Live Load, LL.....	3-5
3.4.2	Multiple Presence Factor, MPF	3-6
3.4.3	Dynamic Load Allowance, IM	3-6
3.4.4	Pedestrian Live Load, PL	3-6
3.4.5	Braking Force, BR	3-6
3.4.6	Centrifugal Force, CE.....	3-7
3.4.7	Live Load Application to Buried Structures	3-7
3.4.8	Live Load Surcharge, LS.....	3-7
3.5	Water Loads, WA	3-7
3.6	Wind Loads	3-8
3.6.1	Wind Load on Structure, WS.....	3-8
3.6.2	Wind on Live Load, WL.....	3-9
3.7	Earthquake Effects, EQ	3-9
3.8	Ice Load, IC	3-9
3.9	Earth Pressure, EV, EH, or ES	3-9
3.10	Temperature, Shrinkage, Creep, Settlement, TU, SH, CR, SE	3-10
3.10.1	Temperature Effects	3-10
3.10.2	Shrinkage Effects	3-13
3.11	Pile Downdrag, DD	3-13

3.12	Friction Forces, FR	3-13
3.12.1	Sliding Bearings.....	3-13
3.12.2	Soil/Backwall Interface and Soil/Footing Interface	3-13
3.13	Extreme Event.....	3-14
3.13.1	Vehicle Collision, CT	3-14
3.13.2	Vessel Collision, CV	3-14
3.14	Uplift.....	3-14
3.15	Construction Loads.....	3-15
3.16	Deflections.....	3-15
4.	STRUCTURAL ANALYSIS AND EVALUATION.....	4-1
4.1	Design QC/QA Process	4-1
4.2	Load Distribution	4-4
4.2.1	Dead Load Distribution	4-4
4.2.2	Live Load Distribution	4-5
4.2.2.1	Steel and Prestressed Concrete Beams	4-5
4.2.2.2	Slab Spans and Timber Decks	4-6
4.2.3	Sidewalk Pedestrian Live Load	4-6
4.3	Load Rating.....	4-6
4.4	Substructure Fixity.....	4-7
4.5	Structural Models.....	4-7
4.6	Design Methodology & Governing Specifications	4-8
4.6.1	Pedestrian Bridges	4-8
4.6.2	Rehabilitation Projects	4-8
4.6.3	Railroad Bridges and Bridges or Structures near Railroads	4-11
5.	CONCRETE STRUCTURES	5-1

5.1	Materials	5-1
5.1.1	Concrete.....	5-1
5.1.2	Reinforcing Steel.....	5-4
5.1.3	Reinforcement Bar Couplers	5-4
5.1.4	Prestressing Steel	5-4
5.1.5	Post-tensioning Hardware	5-5
5.2	Reinforcement Details.....	5-5
5.2.1	Minimum Clear Cover and Clear Spacing	5-5
5.2.2	Reinforcing Bar Lists.....	5-7
5.2.3	General Reinforcement Practices	5-14
5.2.4	Reinforcement Bar Couplers	5-14
5.2.5	Adhesive Anchors.....	5-14
5.2.6	Shrinkage and Temperature Reinforcement	5-15
5.3	Concrete Slabs	5-15
5.3.1	Geometry	5-15
5.3.2	Design/Analysis	5-16
5.3.3	Exterior Strip.....	5-17
5.3.4	Reinforcement Layout.....	5-17
5.3.5	Camber and Deflections	5-19
5.4	Pretensioned Concrete	5-20
5.4.1	Geometry	5-20
5.4.2	Stress Limits	5-23
5.4.3	Design/Analysis	5-23
5.4.4	Detailing/Reinforcement.....	5-27
5.4.5	Camber and Deflection	5-28
5.4.6	Standard I-Beams	5-29
5.4.7	Rectangular Beams	5-29
5.4.8	Double-Tee Beams	5-30
5.5	Post-Tensioned Concrete.....	5-30
5.5.1	PT Slab Bridges	5-30
5.5.2	PT I-Girders	5-30
5.5.3	PT Precast or Cast-In-Place Box Girders	5-30
5.6	Concrete Finishes and Coatings.....	5-31

5.7	Design Examples	5-32
5.7.1	Three-Span Haunched Reinforced Concrete Slab.....	5-33
5.7.2	Prestressed I-Beam Design Example.....	5-65
5.7.3	Three-Span Haunched Post-Tensioned Concrete Slab Design Example	5-97
	APPENDIX 5-A.....	5-137
6.	STEEL STRUCTURES.....	6-1
6.1	Materials	6-1
6.2	General Dimensions And Details.....	6-4
6.3	General Design Philosophy	6-7
6.3.1	Shear Connectors	6-8
6.3.2	Fatigue.....	6-8
6.3.3	Deflections.....	6-9
6.3.4	Camber	6-10
6.4	Rolled Beams	6-13
6.5	Plate Girders	6-13
6.5.1	High Performance Steel Girders.....	6-14
6.6	Horizontally Curved Steel Girders	6-14
6.7	Box Or Tub Girders	6-17
6.8	Bolted Connections And Splices.....	6-18
6.9	Two-Span Plate Girder Design Example.....	6-19
	APPENDIX 6-A.....	6-117
7.	RESERVED	
8.	WOOD STRUCTURES	8-1
8.1	Materials	8-1
8.1.1	Wood Products	8-2
8.1.2	Fasteners And Hardware	8-4
8.1.3	Wood Preservatives.....	8-4
8.2	Timber Bridge Decks	8-7
8.2.1	General Design and Detailing.....	8-7

8.2.2	Loads	8-8
8.2.3	Longitudinal Wood Decks	8-8
8.2.4	Design/Analysis	8-11
8.2.5	Detailing	8-12
8.3	Timber Bridge Superstructures.....	8-13
8.3.1	Camber/Deflections	8-13
8.4	Timber Pile Caps/Substructures	8-14
8.4.1	Substructure Details	8-14
8.4.2	Geometry	8-14
8.4.3	Design/Analysis	8-15
8.4.4	Camber/Deflections	8-15
8.5	Railings	8-15
8.6	Additional References	8-16
8.7	Design Examples	8-16
8.7.1	Longitudinally Spike Laminated Timber Deck Design Example.....	8-17
8.7.2	Timber Pile Cap Design Example	8-39
8.7.3	Glulam Beam Superstructure Design Example	8-51
8.7.4	Transverse Deck Design Examples.....	8-73
8.8	Load Rating Examples	8-103
8.8.1	Longitudinal Spike Laminated Timber Deck Rating Example.....	8-105
8.8.2	Glulam Beam Superstructure Rating Example.....	8-107
8.8.3	Transverse Deck Rating Examples	8-113
9.	DECKS AND DECK SYSTEMS	9-1
9.1	General	9-1
9.1.1	Deck Drainage	9-2
9.2	Concrete Deck on Beams	9-2
9.2.1	Deck Design and Detailing	9-4
9.3	Reinforced Concrete Deck Design Example	9-19
10.	FOUNDATIONS	10-1
10.1	Determination of Foundation Type and Capacity	10-1
10.1.1	Foundation Report.....	10-1

10.1.2	Foundation Recommendations	10-1
10.2	Piles.....	10-3
10.3	Drilled Shafts	10-7
10.4	Footings	10-10
10.4.1	General	10-10
10.4.2	Footings Supported on Piling or Drilled Shafts	10-11
10.4.3	Spread Footings.....	10-15
10.5	Pile Bent Piers and Integral Abutments	10-15
10.6	Evaluation of Existing Pile Foundations when Exposed by Scour	10-16
10.7	Structure Excavation and Backfill	10-17
10.8	Appendix 10-A: Sample Bridge Construction Unit Recommendations .	10-19
11.	ABUTMENTS, PIERS, AND WALLS	11-1
11.1	Abutments.....	11-1
11.1.1	Integral Abutments	11-5
11.1.2	Semi-Integral Abutments	11-18
11.1.3	Parapet Abutments.....	11-24
11.1.3.1	Low Abutments	11-26
11.1.3.2	High Abutments	11-26
11.1.3.3	Parapet Abutments Behind MSE Walls.....	11-26
11.1.4	Wingwalls	11-29
11.1.4.1	Wingwall Geometry.....	11-29
11.1.4.2	Wingwall Design.....	11-31
11.1.5	Bridge Approach Panels	11-33
11.1.6	Bridge Approach Treatment.....	11-34
11.2	Piers	11-34
11.2.1	Geometrics	11-34
11.2.2	Pier Design and Reinforcement	11-36
11.2.2.1	Pile Bent Piers.....	11-37
11.2.2.2	Cap and Column Type Piers.....	11-39
11.2.3	Pier Protection.....	11-41
11.2.3.1	Protection From Vessel Collision.....	11-41
11.2.3.2	Protection From Vehicle & Train Collision.....	11-41

11.2.3.2.1	Pier Protection for New Bridges Over Roadways	11-42
11.2.3.2.2	Pier Protection for New Bridges Over Railways.....	11-43
11.2.3.2.3	Pier Protection for Existing Bridges Over Roadways.	11-44
11.2.3.2.4	Crash Struts for Pier Protection From Vehicle Collision	11-45
11.2.3.2.5	Barrier Protection of Piers.....	11-50
11.3	Retaining Walls.....	11-52
11.3.1	Cantilever Retaining Walls.....	11-52
11.3.2	Counterfort Retaining Walls	11-53
11.3.3	Anchored Walls.....	11-53
11.3.4	Prefabricated Modular Block Walls	11-54
11.3.5	Mechanically Stabilized Earth Walls.....	11-54
11.3.6	Noise Barriers.....	11-56
11.3.7	Cantilevered Sheet Pile Walls.....	11-58
11.4	Design Examples	11-60
11.4.1	High Parapet Abutment Design Example.....	11-61
11.4.2	Retaining Wall Design Example	11-99
11.4.3	Three-Column Pier Design Example	11-137
12.	BURIED STRUCTURES.....	12-1
12.1	Geotechnical Properties	12-1
12.2	Box Culverts	12-2
12.2.1	Precast Concrete Box Culverts	12-2
12.2.2	Cast-In-Place Concrete Box Culverts.....	12-3
12.2.3	Design Guidance for Box Culverts.....	12-3
12.3	Arched & Three-Sided Structures	12-17
12.3.1	Three-Sided Precast Concrete Structures.....	12-17
12.3.2	Precast Concrete Arch Structures	12-18
12.3.3	Scour Protection Guidelines	12-20
12.4	Use of Long-Span Corrugated Steel Structures	12-25
12.5	10' x 10' Precast Concrete Box Culvert Design Example.....	12-27
12.6	16' x 12' Precast Concrete Box Culvert Live Load Distr. Example.....	12-51

13.	RAILINGS	13-1
13.1	Materials	13-1
13.2	Design Requirements	13-1
13.2.1	Traffic Railing	13-9
13.2.2	Pedestrian/Bicycle Railing	13-11
13.2.3	Combination Railing	13-11
13.2.4	Strength of Standard Concrete Barriers	13-12
13.2.5	Protective Screening	13-15
13.2.6	Architectural/Ornamental Railings	13-15
13.3	Design Examples	13-16
13.3.1	Type F Barrier Design Example	13-17
13.3.2	Adhesive Anchor Design Example	13-31
14.	JOINTS AND BEARINGS	14-1
14.1	Bridge Movements and Fixity	14-1
14.2	Expansion Joints	14-2
14.2.1	Thermal Movements	14-2
14.2.2	Strip Seal Expansion Joints	14-2
14.2.3	Modular Expansion Joints	14-3
14.2.4	Expansion Joint Detailing	14-3
14.3	Bearings	14-4
14.3.1	Loads and Movements	14-5
14.3.2	Bearing Details	14-5
14.3.3	Elastomeric Bearings	14-6
14.3.3.1	Design	14-7
14.3.3.1.1	Size and Stability	14-7
14.3.3.2	Fixed Bearings	14-8
14.3.3.3	Expansion Bearings	14-8
14.3.3.3.1	Minimum Compressive Load	14-9
14.3.4	Disc Bearings	14-10
14.3.5	Other Types of Bearings	14-10
14.4	Curved Plate Design	14-11
14.5	Bearing Plate Design	14-12

14.6	Sole Plate Design (Steel Beams)	14-13
14.7	Tables	14-13
14.8	Design Examples	14-22
14.8.1	Fixed Elastomeric Bearing Design Example	14-23
14.8.2	Expansion Elastomeric Bearing Design Example.....	14-33
15.	BRIDGE LOAD RATING	15-1
15.1	General	15-1
15.2	Analysis	15-3
15.2.1	Computer Programs	15-3
15.2.2	Refined Analysis	15-3
15.3	Loads.....	15-4
15.4	Rating Equation Factors.....	15-6
15.5	Rating New Bridges.....	15-6
15.6	Re-rating Existing Bridges.....	15-6
15.7	Substructures	15-7
15.8	Non-Standard Bridge Types	15-8
15.9	Timber Bridges.....	15-8
15.10	Culverts	15-9.
15.11	Gusset Plates	15-11
15.12	Load Testing	15-11
15.13	Load Posting	15-11
15.13.1	General	15-11
15.13.2	Rating Factors for Posting	15-14
15.14	Overweight Permits.....	15-15
15.15	Physical Inspection Rating (PIR)	15-16
15.16	Forms and Documentation	15-17
15.17	Submittal / Filing.....	15-19
	APPENDIX 15-A: GLOSSARY.....	15-20
	APPENDIX 15-B: RATING FORMS	15-24
	APPENDIX 15-C: OVERWEIGHT PERMIT RESTRICTIONS FOR BRIDGES.....	15-25
	APPENDIX 15-D: MINNESOTA LEGAL (POSTING) LOADS	15-26.1
	APPENDIX 15-E: MINNESOTA STANDARD PERMIT TRUCKS G-80	15-27

APPENDIX 15-F: MINNESOTA STANDARD PERMIT TRUCKS G-07	15-28
--	-------

APPENDIX A. MEMOS

#2005-01	REMOVED
#2005-02	REMOVED
#2005-03	REMOVED
#2006-01	REMOVED
#2007-01	REMOVED
#2007-02	Adhesive Anchors Under Sustained Tensile Loads (dated Oct. 3, 2007)
#2007-03	REMOVED
#2008-01	Prestressed Concrete Design – Calculation of Prestress Losses and Beam Camber & Deflection.....(dated Sept. 18, 2008)
#2008-02	Truss Bridge Gusset Plate Analysis (dated Oct. 20, 2008)
#2011-01	REMOVED
#2011-02	REMOVED
#2011-03	Interim Guidance for Installation of Temporary Barriers on Bridges and Approach Panels (dated December 23, 2011)
#2012-01	Discontinued Usage of Plain Elastomeric Bearing Pads and Substitution with Cotton-Duck Bearing Pads (dated April 12, 2012)
#2012-02	Transition to New MnDOT Pile Formula 2012 (MPF12)..... (dated November 21, 2012)
#2013-01	Conversion from Metric to U.S. Cust. Rebar Designations (dated April 17, 2013)
#2014-01	AASHTO LRFD Article 5.7.3.4 Concrete Crack Control Check (dated August 6, 2014)
#2014-02	Inclusion of Informational Quantities in Bridge Plans (dated December 23, 2014)
#2015-01	Concrete Mix Design Designations (dated August 10, 2015)
#2016-01	Single Slope Barrier (Type S) Bridge Standards(dated December 09, 2016)
#2017-01	Edge-of-Deck Thickness on Bridges and Wall Coping Height (dated March 28, 2017)
#2017-02	Post-Installed Anchorages for Reinforcing Bars ... (dated October 19, 2017)